
Rotorflush RUBI 80SFQ23.7-400AR Range Self-cleaning Filterpump General Specifications

General Arrangements

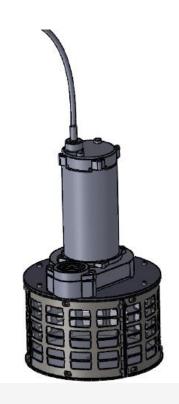


Key Features

- Integral self-cleaning filter
- 316 Stainless steel filter mesh
- Filter mesh from 1 3 mm
- Reliable and low maintenance
- Continuous backwash whenever water is being pumped
- Capital, installation and maintenance costs reduced
- All stainless steel filter cage construction

www.rotorflush.com Tel: +44 (0)1297 560229 Email: sales@rotorflush.com

Rotorflush RUBI 80SFQ23.7-400AR Range Self-cleaning Filterpump General Specifications

Performance Curves

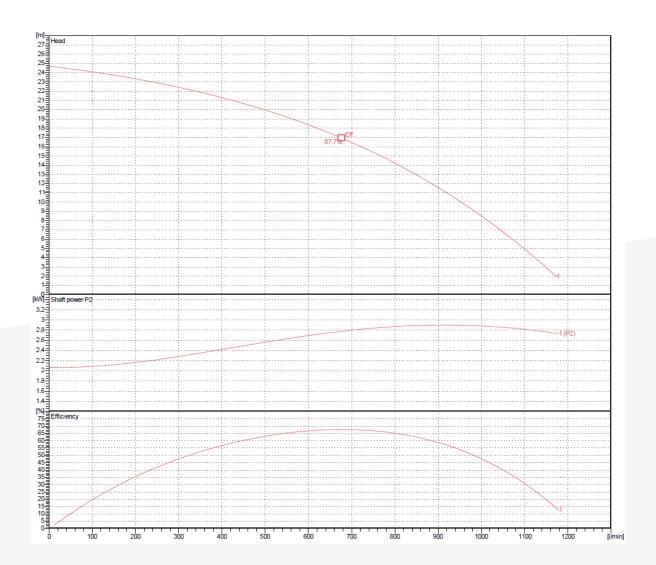

www.rotorflush.com

Tel: +44 (0)1297 560229

Email: sales@rotorflush.com

Rotorflush RUBI 80SFQ23.7-400AR Range Self-cleaning Filterpump General Specifications

Pump Specification

Specification

Electric submersible pump
Degree of protection IP 68
Depth of submersion max. 15 m
Type of impeller Semi-open
Max. solid handling 15 mm
Suitable for:
corrosive liquids

Electric motor

Dry-type submersible induction motor Insulation class F 2 Poles 2850 1/min

Starting mode Directly

Rated voltage 400 ∨ 50 Hz 3~

 Power uptake
 4.58 kW

 Rated power
 3.70 kW

 Rated current
 7.3 A

 Start current
 58.0 A

Cable

10m H07RN-F 4Cx1,5mm2

Motor Protection

Miniature protector in windings (snap-action bi-metal device)

Shaft seal

Double inside mechanical seal in oil bath additional lubrication by oil lifting device

Primary seal

Silicon carbide on silicon carbide

Secondary seal

Silicon carbide on silicon carbide

Bearings

Shielded ball bearings, maintenance-free

Materials

 Impeller
 SCS14 (SUS GX5CrNiMo19-11-2)

 Pump casing
 SCS14 (SUS GX5CrNiMo19-11-2)

 Suction cover
 SCS14 (SUS GX5CrNiMo19-11-2)

 Motor Frame
 SCS14 (SUS GX5CrNiMo19-11-2)

 Shaft
 SUS316 (EN-X5CrNiMo17-12-2)

www.rotorflush.com

Tel: +44 (0)1297 560229 Email: sales@rotorflush.com

Rotorflush RUBI 80SFQ23.7-400AR Range Self-cleaning Filterpump

General Specifications

Self-cleaning Filterpump Specification


Self-cleaning Filter Construction	
Filter Screen Area	2500cm2
Standard Screen Sizes	315 micron, 1mm, 2mm
Filter mesh	316 Sintered stainless steel mesh (315 micron) 316 Stainless steel woven mesh (1mm and 2mm)
Impeller Extension Shaft	Stainless Steel
Impeller	Stainless steel
Rotor	ABS (Acrylonitrile Butadiene Styrene)
Rotor Bearings	Silicon Carbide
Filter Cage	Stainless Steel
Cleaning Jets	Natural Rubber Jets, Stainless Steel Clips


www.rotorflush.com Tel: +44 (0)1297 560229 Email: sales@rotorflush.com

Rotorflush RUBI 80SFQ23.7-400AR Range Self-cleaning Filterpump

General Specifications

Dimensions

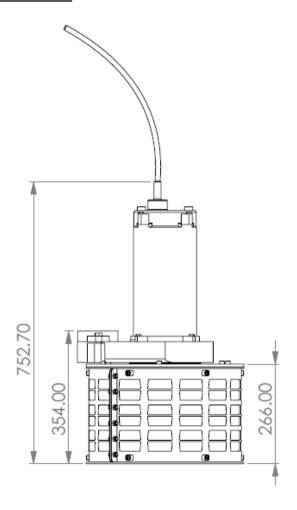

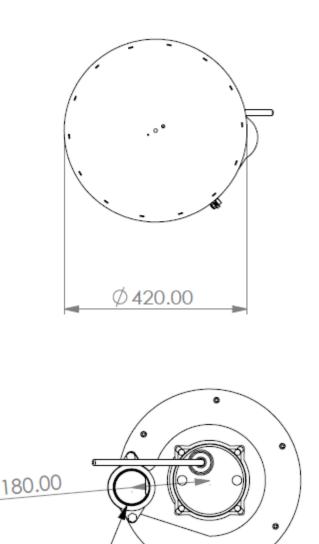

Approx weight 70kg

*Dimensions and weights are approximate

www.rotorflush.com

Tel: +44 (0)1297 560229

3" female outlet

Email: sales@rotorflush.com