

Rotorflush GT200 Liquid Solids Separator

General Specifications

Rotorflush Filters GT200 General Arrangements



Key Features

- Screen up to 220 l/min
- Filter down to 50 micron
- Reliable and easy to install and use
- Incorporates award winning Rotorflush Filterpump
- Tough MDPE construction

Rotorflush GT200 Liquid Solids Separator

General Specifications

Models and Specifications


General Specifications

Inlet	Pump Outlet	Overflow	Drain	Auto Purge	Filtration Sizes
2" BSP Male	1.23" BSP Male	2" BSP Male	2" BSP Female	Optional	50 µm, 100 µm, 315 µm, 1mm, 2 mm

Models

Model	Volts	kW	Amps	L/min Max	Head (metres) Max
GT200-O1608	230	0.4	2.4	150	7
GT200-O25010	230	0.55	4.5	225	10
GT200-O35012	230	0.8	5.1	225	11
GT200-O2008	110	0.55	6	200	8

Performance Curves

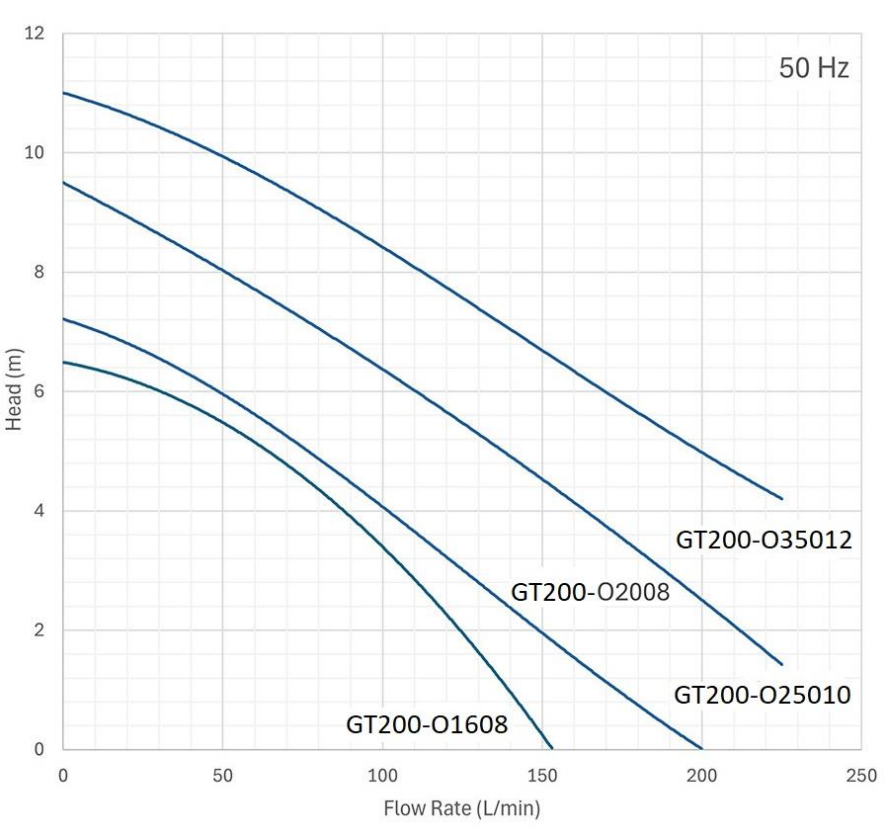

Rotorflush GT200 Liquid Solids Separator

General Specifications


Construction

Component	Material
Filter Mesh	316 Stainless Steel
Vessel	Polyethylene
Cleaning Rotor	Acetal
Jets	Acetal
Rotor Bearings	Silicon Carbide/Acetal
Filter body	304 Stainless Steel
Motor Body	304 Stainless Steel
Control Enclosure	ABS
Pipe Fittings	PVC-U

Dimensions and Weight

Height	Diameter	Empty Weight	Full weight
1315 mm	450 mm	32 kg	140 kg

*Dimensions and weights are approximate

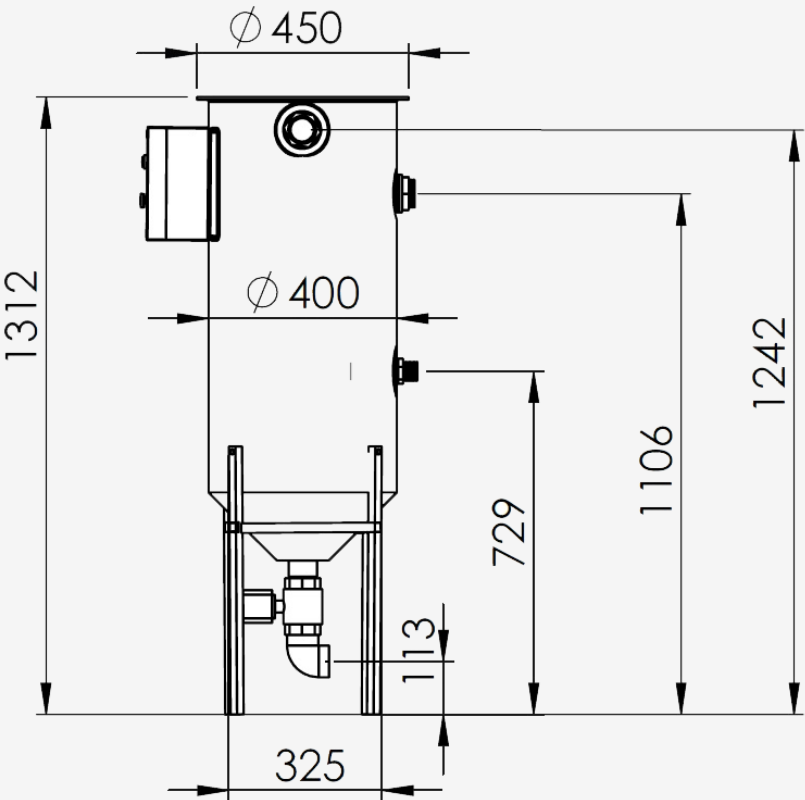

Rotorflush GT200 Liquid Solids Separator

General Specifications

General Assembly

